

## Modular Cooking - Meritus

### Gas - Tilting Pan

#### NGTP 8-75 (ME)



Due to continuous technical development, the image shown may not represent the latest design of the unit.

#### DESCRIPTION

Modular gas tilting braising pan with 750 mm depth and 12 kW tubular burner.

Usable for multitude application: boiling, steaming, frying, braising and simmering.

Made of AISI 304 with 1.5 mm top thickness, griddle is made of 10 mm thick AISI 420, knife steel, that prevent rust and deliver good thermal conductivity. Manual tilting operation through rotating handle.

#### OTHER AVAILABLE MODELS

- N/A

#### MAIN FEATURES

- Powered with 12 kW chrome-plated tubular burner.
- Capacity up to 40 liters.
- Welded AISI griddle AISI 420 with thickness of 20 mm, preventing rust.
- Temperature control from 100 to 300 degree Celcius.
- Piezzo ignition system with rubber cover.
- Equipped with flame failure device.

#### CONSTRUCTION

- External construction entirely with AISI 304.
- Top panel with 1.5 mm thickness. Orbital surface finishing: resistant toward scratches.
- Front panel is constructed of 0.8 mm AISI 304 with satin surface finish.
- Side panel is constructed of 0.8 mm AISI 304 with satin surface finish.
- Adjustable +/- 25 mm AISI leg.
- Nayati connection system between Meritus products on the front panels, cabinets, and splashbacks.
- Cabinet executed with H2 radius.
- Deep drawn front panel to minimize liquid penetration to the internal part.
- Gasket protection behind the knobs to prevent water to seeping in, prolonging main heating regulation parts.


#### INCLUDED ACCESSORIES

- G20 Conversion Kit


#### OPTIONAL ACCESSORIES

- Joint clip ME.
- Motorized-tilting option.


**FRONT**

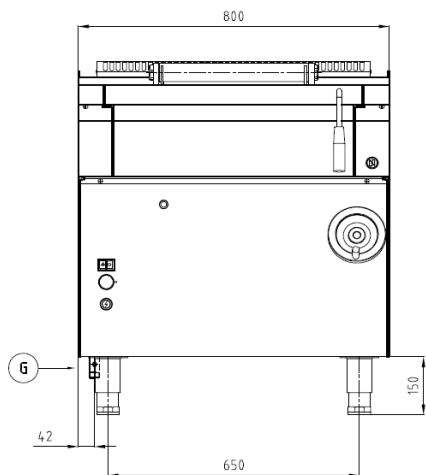

**TOP**

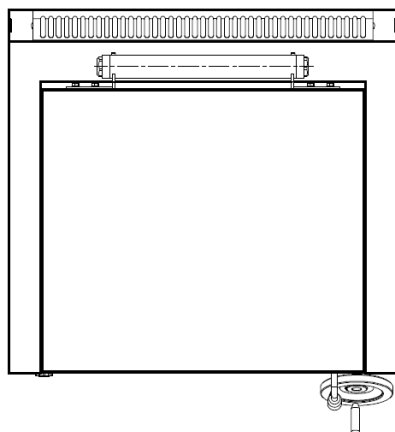

**SIDE**

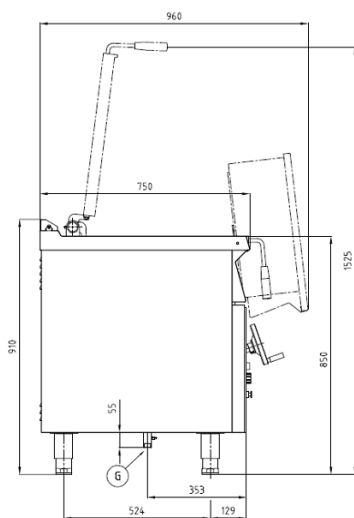

\*Overall dimension in mm

**TECHNICAL DATA**

External Dimensions

Width : 800 mm  
Depth : 750 mm  
Height : 850/900 mm

Cooking Surface

Cooking zones : 40 liters, 586 x 443 mm

Gas Power Rating

Heat input total : LPG/Natural Gas 12 kW  
No. of burners : 1  
Control type : Modulating temperature control  
Gas type options : LPG G30, G31  
Natural Gas G20, G25, G25.3

Connections

Gas : DN 20 (3/4")  
Water : N/A  
Drain : N/A

Heat & Steam Emissions

Direct heat emission : 5.4 kW  
Latent heat emission : 5.4 kW  
Steam emission : 7.56 kg/h

PACKAGING DATA

Width : 830 mm  
Depth : 780 mm  
Height : 1020 mm  
Volume : 0.66 m<sup>3</sup>

WEIGHT

Net Weight : 130 kg  
Gross Weight : 146 kg