

Modular Cooking - Grandis

Electric - Fryer

NEF 8-90 GR



Due to continuous technical development, the image shown may not represent the latest design of the unit.

DESCRIPTION

Modular electric fryer with 900 mm depth for double basket use and heated with 2 x 21 kW incoloy heaters. Equipped with swing doors.

Usable for deep frying.

Made of AISI 304 with 2 mm top thickness, temperature controlled, fully welded double fryer tank for double basket with oil capacity of 21 liters each, includes tank cover, oil drain kit, crumb filter and hook for lifting heater.

OTHER AVAILABLE MODELS

- NEF 6-90 GR
- NEF 4-90 GR

MAIN FEATURES

- Powered with 2 x 21 kW incoloy heaters
- Oil capacity of 2 x 21 liters
- Heater can be tilted for access of cleaning of the tank.
- Fully welded fryer tank constructed from AISI 304.
- Drain valve with 3/4" on the cabinet provided
- Temperature control from 100 degree Celcius to 190 degree Celcius.
- Thermal-cut off when overheated.

CONSTRUCTION

- External construction entirely with AISI 304.
- Top panel with 2 mm thickness. Orbital surface finishing: resistant toward scratches.
- Front panel is constructed of 1 mm AISI 304 with satin surface finish.
- Side panel is constructed of 0.8 mm AISI 304 with satin surface finish.
- Adjustable +/- 25 mm AISI leg.
- Cabinet executed with H2 radius.
- Connector between Grandis product on the front and the back.
- IPX4 water protection level.

INCLUDED ACCESSORIES

- 4 x Fryer Basket.
- Crumb filter.
- Oil drain kit and tank cover.
- Swing door.

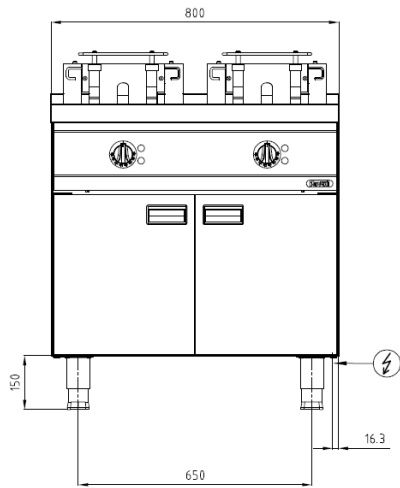
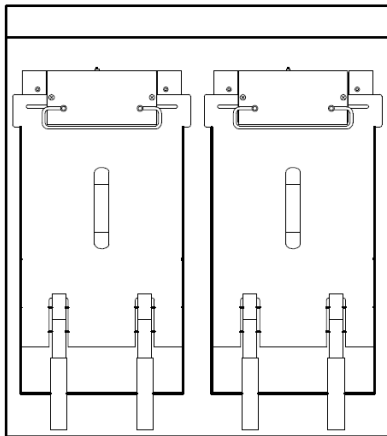
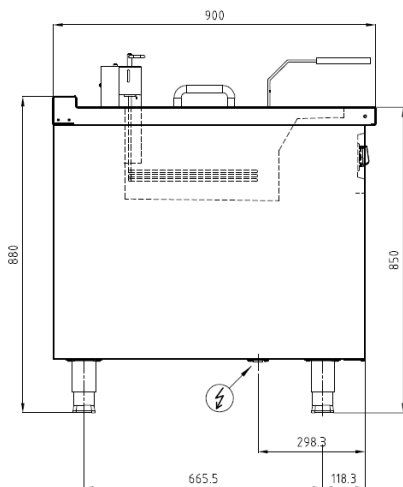
OPTIONAL ACCESSORIES

- Joint clip GR.
- Power cable, H07RN-F (5 x 10 mm) p/mtr.

PT. NAYATI INDONESIA

www.nayati.com

Nayati reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.

FRONT**TOP****SIDE**

*Overall dimension in mm

TECHNICAL DATA**External Dimensions**

Width	: 800 mm
Depth	: 900 mm
Height	: 850/960 mm

Cooking Surface

Cooking zones	: 2 x 22 liters, 2 x 340 x 430 mm
Heating zones	: 2
Control type	: Modulating temperature control

Electrical Supply Data

Total connected load	: 42 kW
Voltage	: 400V, 3NPE AC /50-60Hz
Recommended fuse	: N/A

Connections

Water	: N/A
Drain	: N/A

Heat & Steam Emissions

Direct heat emission	: 3.78 kW
Latent heat emission	: 29.4 kW
Steam emission	: 43.26 kg/h

PACKAGING DATA

Width	: 830 mm
Depth	: 930 mm
Height	: 1000 mm
Volume	: 0.77 m ³

WEIGHT

Net Weight	: 112 kg
Gross Weight	: 143 kg