

Modular Cooking - Grandis

Gas - Range

NGTR 8-90 GR



Due to continuous technical development, the image shown may not represent the latest design of the unit.

DESCRIPTION

Modular gas open burner with 900 mm depth and 4 hobs, 2 sets of 5.5 kW and 10 kW cast iron burners. Equipped with open cabinet.

Usable for boiling, steaming, frying, braising, simmering and steam frying.

Made of AISI 304 with 2 mm top thickness, manual ignited, fully welded basin for hygiene purpose, galvanized coated cast iron burner.

OTHER AVAILABLE MODELS

- NGR 12-90 GR
- NGR 8-90 GR
- NGTR 12-90 GR
- NGTR 4-90 GR
- NGR 8-90 DFX EOVS GR
- NGR 12-90 DFX EOVS GR

MAIN FEATURES

- Powered with a 4 hobs, 2 sets of 5.5 kW and 10 kW cast iron open burner.
- Fully-welded basin for hygiene.
- Cast iron pot holder with long fin to support various size of pot or pan.
- Equipped with flame failure device.
- The optimized pan diameter for 5.5 kW burner is between 240-460 mm.
- The optimized pan diameter for 10 kW burner is between 300-500 mm.

CONSTRUCTION

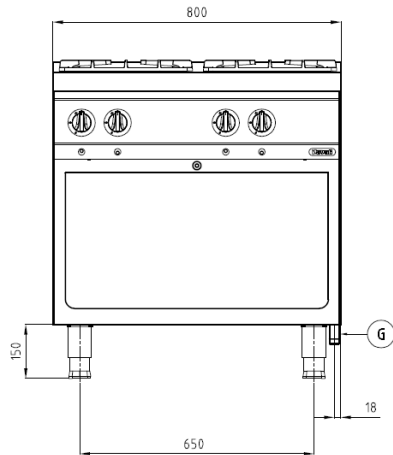
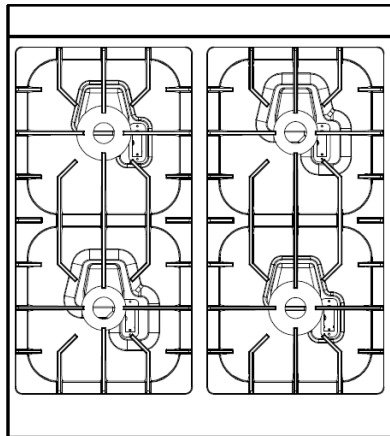
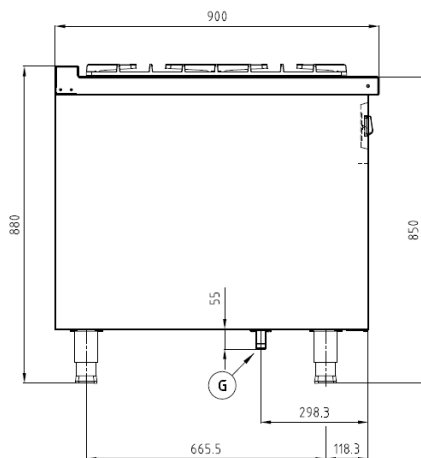
- External construction entirely with AISI 304.
- Top panel with 2 mm thickness. Orbital surface finishing: resistant toward scratches.
- Front panel is constructed of 1 mm AISI 304 with satin surface finish.
- Side panel is constructed of 0.8 mm AISI 304 with satin surface finish.
- Adjustable +/- 25 mm AISI leg.
- Cabinet executed with H2 radius.
- Connector between Grandis product on the front and the back.

INCLUDED ACCESSORIES

- G20 Conversion Kit
- Cast iron pot holder.

OPTIONAL ACCESSORIES

- Stainless steel pot holder GR.
- Joint clip GR.
- Swing door 8-90 GR.

FRONT**TOP****SIDE**

*Overall dimension in mm

TECHNICAL DATA**External Dimensions**

Width	: 800 mm
Depth	: 900 mm
Height	: 850/910 mm

Cooking Surface

Cooking zones	: 2 x 370 x 725 mm
---------------	--------------------

Gas Power Rating

Heat input total	: LPG/Natural Gas 31 kW
No. of burners	: 4
Control type	: High - low power control
Gas type options	: LPG G30, G31 Natural Gas G20, G25

Connections

Gas	: DN 20 (3/4")
Water	: N/A
Drain	: N/A

Heat & Steam Emissions

Direct heat emission	: 7.75 kW
Latent heat emission	: 3.10 kW
Steam emission	: 4.56 kg/h

PACKAGING DATA

Width	: 830 mm
Depth	: 930 mm
Height	: 1030 mm
Volume	: 0.80 m ³

WEIGHT

Net Weight	: 81 kg
Gross Weight	: 143 kg